



The tast min

0	4 :			\ <u>\</u>	8	16	. 31
VERSION	HEADER L	E	N	этн	SORT OF SERVICE	DA	TAGRAM LENGTH
IDENTIFICATION						FLAG	FRAGMENT OFFSET
TIME	TO LIVE (T	Τ	IJ		PROTOCOL	HE	ADER CHECKSUM
	1 1				SOURCE ADDRESS		
DESTINATION ADDRESS							
					OPTION ;		
					APPLICATION		

The first of the first that well with the first that the first tha


401

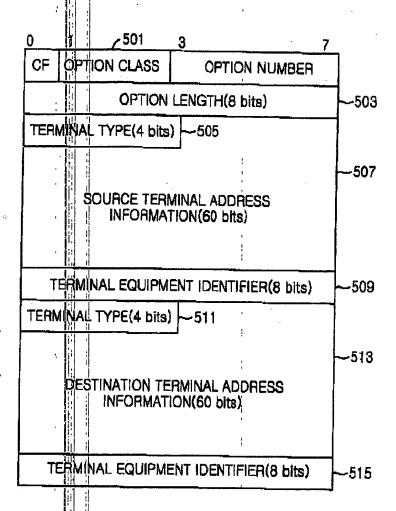


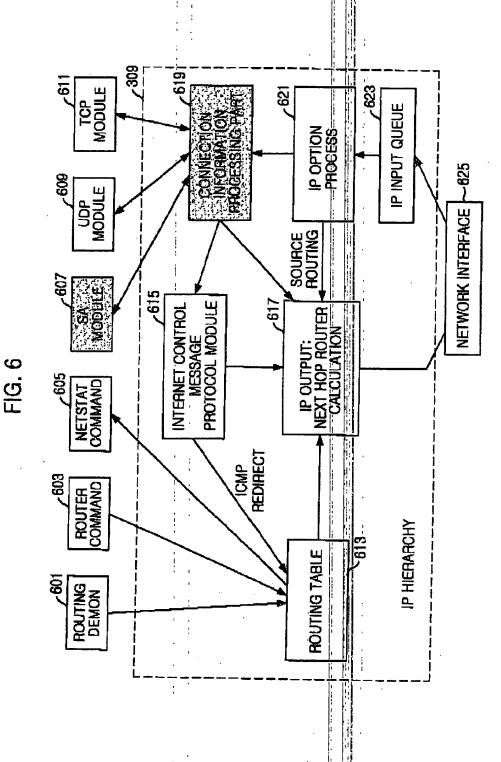


701	₁ 702	
E.164 ADDRESS	TEI	LINK IDENTIFIER
XXXXXXXXXXXXX	хх	DLCI (IN CASE OF FRAME RELAY)
YYYYYYYYYYY	YY	VPI/VCI (IN CASE OF ATM)

装。 铁线

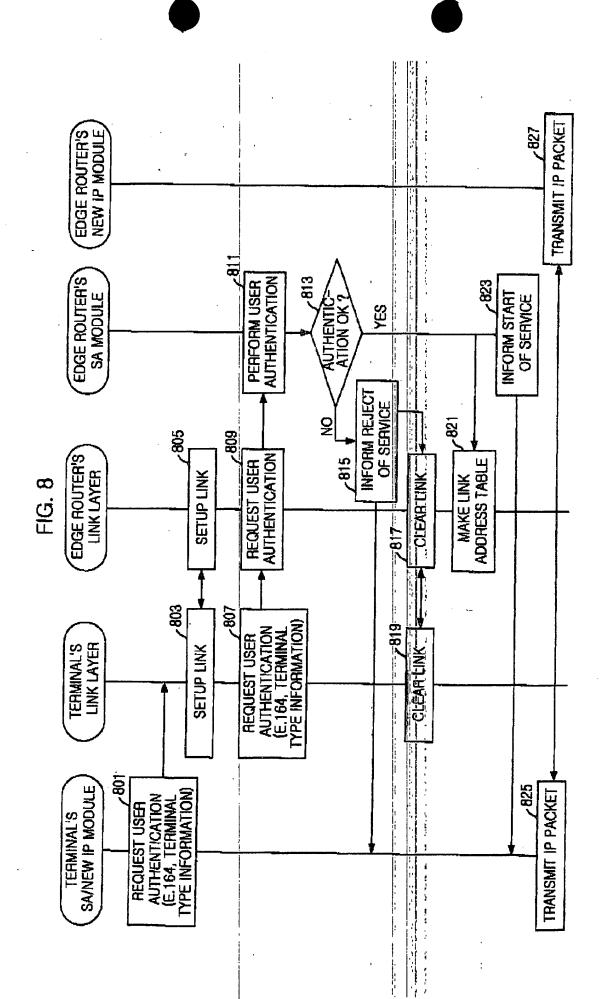

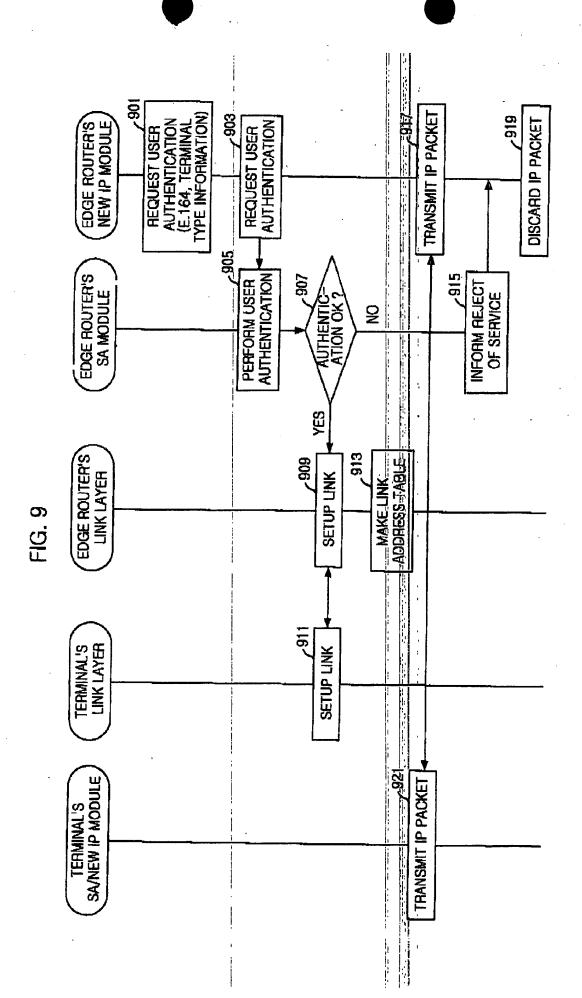

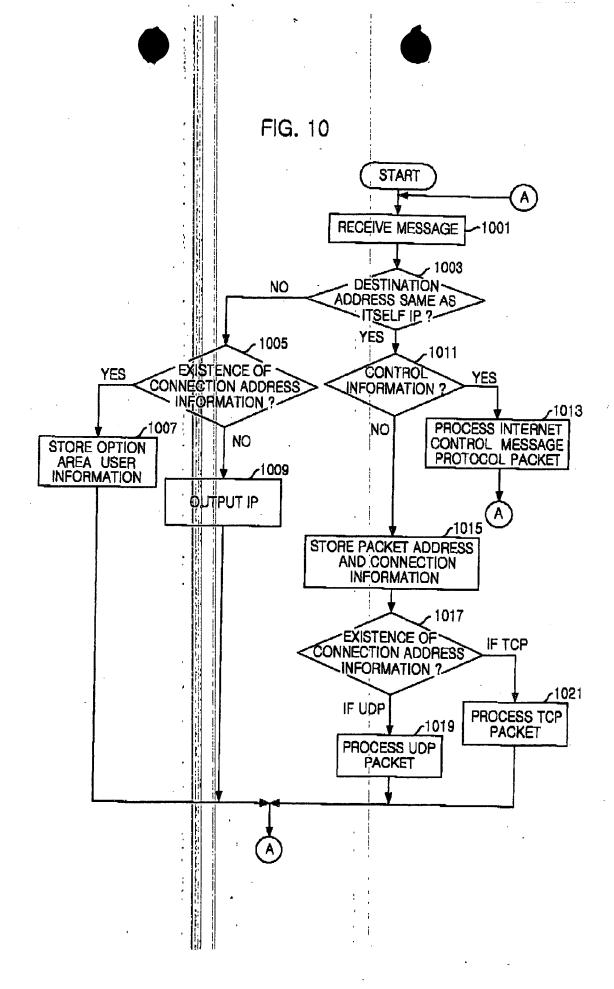

il mile

1,4